


INTERNATIONAL



MULTIPLE OUTLET STRIPS

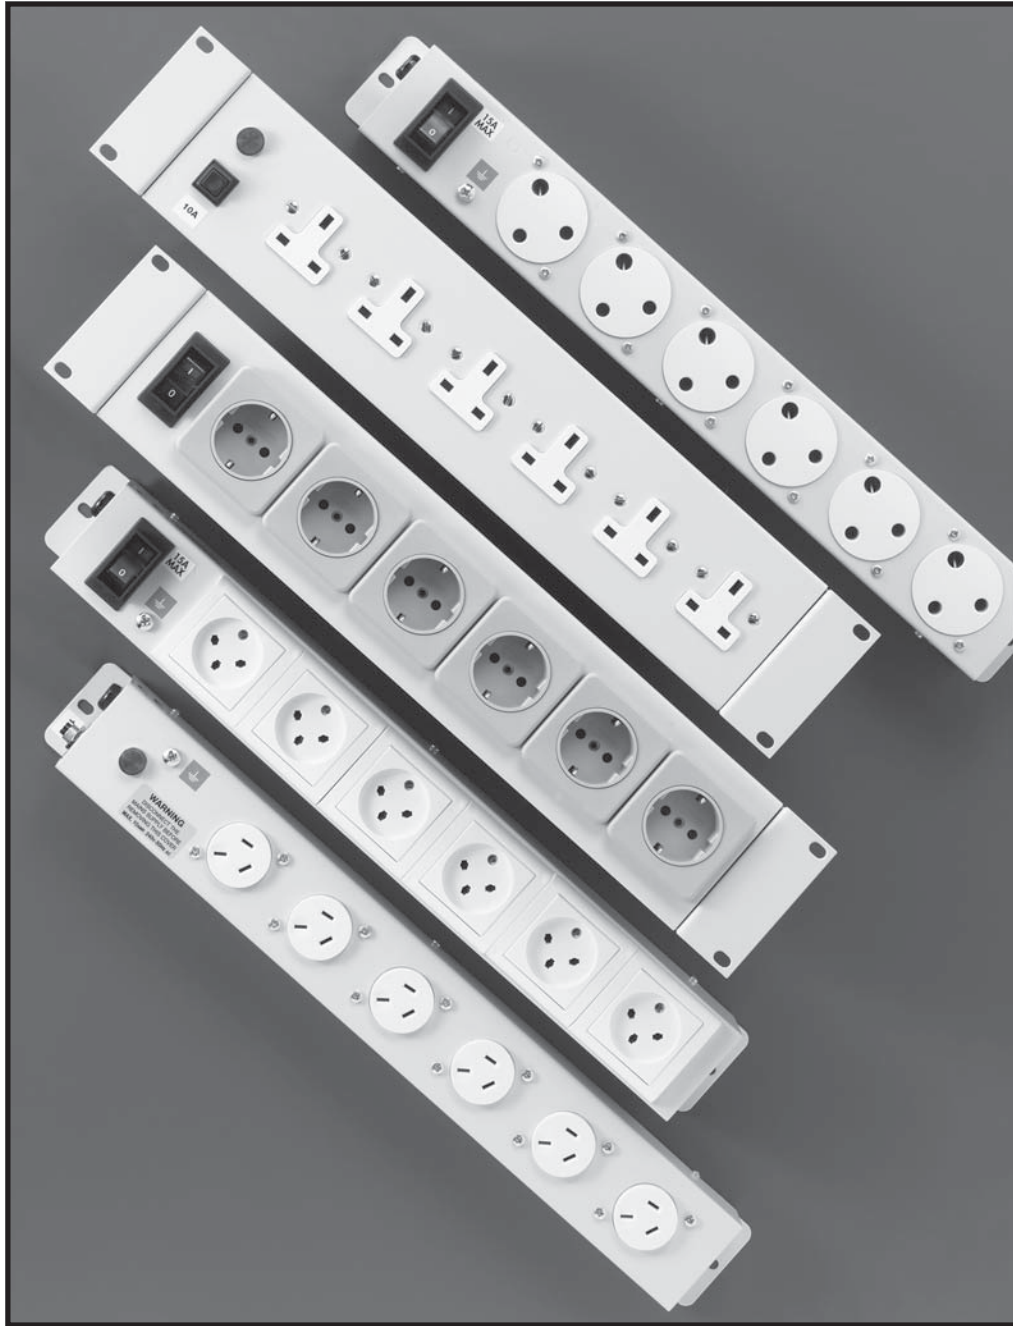

© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com



International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 101

VERTICAL RACK MOUNT OR SURFACE MOUNT

(HEAVY DUTY)

Multiple Outlet Power Strips

2 Pole 3 Wire Grounding, "CE" MARK

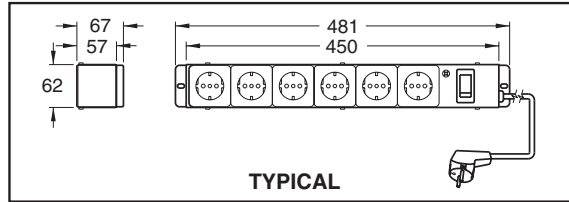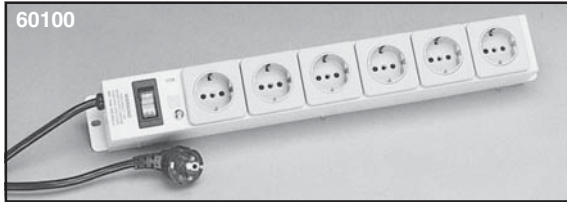

General Specification Data

Heavy duty steel enclosure, painted gray.
Two meter long 1.5 mm² cord with matching plug.
Double pole illuminated circuit breakers.

Technical Data

Receptacles meet applicable VDE, BS 1363, UTE, SEV, Dept. of Fair Trading, CEI, IMQ, UL or CSA standards.
Test standard: BS 3456, manufactured to BS 5733
"CE" mark

Receptacle / Plug Configuration		Catalog Number	Description
Receptacle	Plug		
EU1-16R	EU1-16P	60100	6 European CEE 7, DIN 49440 "SCHUKO" 16 ampere 250 volt receptacles. 2 meter long cord with non-polarized "SCHUKO" plug. Illuminated double pole circuit breaker, 15 ampere.
UK1-13R	UK1-13P	60150	6 United Kingdom (BS 1363) 13 ampere 250 volt receptacles. 2 meter long cord with fused 13 ampere U.K. plug. Illuminated double pole circuit breaker, 12 ampere.
FR1-16R	EU1-16P	60200	6 French 16 ampere 250 volt receptacles. 2 meter long cord with non-polarized "SCHUKO" plug. Illuminated double pole circuit breaker, 15 ampere.
SW1-10R	SW1-10P	60250	6 Swiss 10 ampere 250 volt receptacles. 2 meter long cord with Swiss plug. Illuminated double pole circuit breaker, 10 ampere.
IT1-10R / IT2-16R	IT1-10P	60300	6 Italian 10 ampere 250 volt receptacles. 2 meter long cord with non-polarized 10 ampere 250 volt Italian plug. Illuminated double pole circuit breaker, 10 ampere.
AU1-10R	AU1-10P	60500	6 Australian 10 ampere 250 volt receptacles. 2 meter long cord with Australian plug. Illuminated double pole circuit breaker, 10 ampere.
NEMA 5-15R	NEMA 5-15P	60350	6 NEMA 5-15R 15 ampere 125 volt receptacles. 2 meter long cord with NEMA 5-15P plug. Illuminated double pole circuit breaker, 15 ampere.
NEMA 6-15R	NEMA 6-15P	60400	6 NEMA 6-15R 15 ampere 250 volt receptacles. 2 meter long cord with NEMA 6-15P plug. Illuminated double pole circuit breaker, 15 ampere.
IEC 60320 C-13	IEC 60320 C-14	60450	8 IEC 60320 C-13 10 ampere 250 volt receptacles. 2 meter long cord with IEC 60320 C-14 plug. Illuminated double pole circuit breaker, 10 ampere.
IEC 60320 C-19	IEC 60320 C-20	60550	8 IEC 60320 C-19 16 ampere 250 volt receptacles. 2 meter long cord with IEC 60320 C-20 plug. Illuminated double pole circuit breaker, 15 ampere.

NOTE: Variations are available including units with surge protection, RFI filters, GFCI (RCD) and special order combinations. Minimum lot quantity may apply to special variations.





VERTICAL RACK MOUNT OR SURFACE MOUNT

(HEAVY DUTY)

Multiple Outlet Power Strips

2 Pole 3 Wire Grounding, "CE" MARK

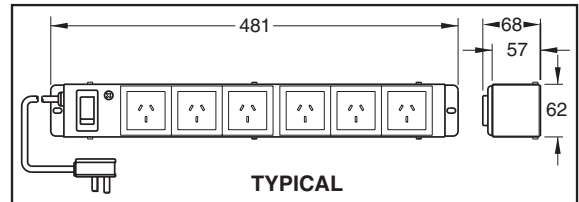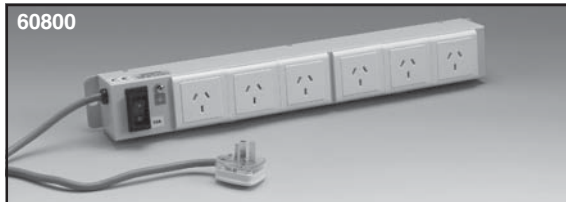











General Specification Data


Heavy duty steel enclosure, painted gray.
Two meter long 1.5 mm² cord with matching plug.
Double pole illuminated circuit breakers.

Technical Data

Receptacles meet applicable CCC, SII, BS 546A or AFSNIT standards.
Test standard: BS 3456, manufactured to BS 5733
"CE" mark

Receptacle / Plug Configuration		Catalog Number	Description
Receptacle	Plug		
 CH1-10R	 CH1-10P	60800	6 Chinese 10 ampere 250 volt receptacles. 2 meter long cord with 10 ampere 250 volt Chinese plug. Illuminated double pole circuit breaker, 10 ampere.
 CH2-16R	 CH2-16P	60900	6 Chinese 16 ampere 250 volt receptacles. 2 meter long cord with 16 ampere 250 volt Chinese plug. Illuminated double pole circuit breaker, 15 ampere.
 DE1-13R	 DE1-13P	60600	6 Danish 13 ampere 250 volt receptacles. 2 meter long cord with Danish plug. Illuminated double pole circuit breaker, 12 ampere.
 UK2-15R	 UK2-15P	60650	6 United Kingdom (BS 546A) 15/16 ampere 250 volt receptacles. 2 meter long cord with BS 546A plug. Illuminated double pole circuit breaker, 15 ampere.
 IS1-16R	 IS1-16P	60700	6 Israeli 16 ampere 250 volt receptacles. 2 meter long cord with Israeli plug. Illuminated double pole circuit breaker, 16 ampere.

12 outlet multi configuration power strip, brackets reversible for surface or rack mounting, 12 foot cord, 2.5 mm², exits end cap of enclosure

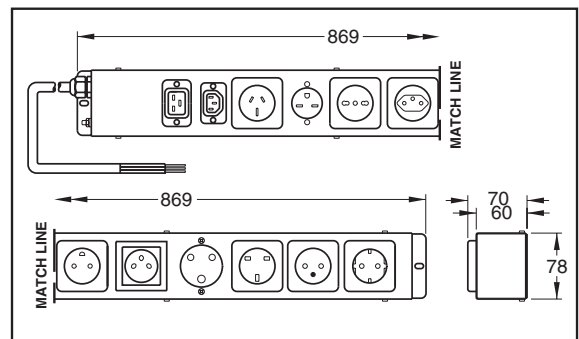

Receptacles - EU1-16R, FR1-16R, AU1-10R, AU2-15R, CH1-10R, UK1-13R, UK2-15R, IS1-16R, DE1-13R, SW1-10R, IT1-10R, IT2-16R, AR1-10R, NEMA 6-15R, IEC 60320 C-13, IEC 60320 C-19.

NOTE: Variations are available including units with surge protection, RFI filters, GFCI (RCD) and special order combinations. Minimum lot quantity may apply to special variations.





© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 103

**19" HORIZONTAL RACK MOUNT
Multiple Outlet Power Strips**
2 Pole 3 Wire Grounding, "CE" MARK

(HEAVY DUTY)

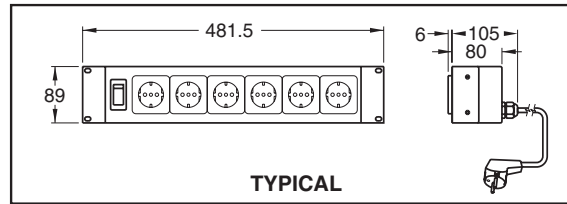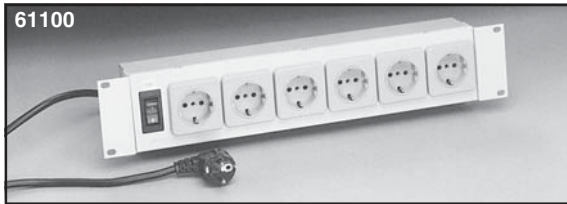

General Specification Data

Heavy duty steel enclosure, painted gray.
Two meter long 1.5 mm² cord with matching plug.
Double pole illuminated circuit breakers.

Technical Data

Receptacles meet applicable VDE, BS 1363, UTE, SEV, Dept. of Fair Trading, CEI, IMQ, UL or CSA standards.
Test standard: BS 3456, manufactured to BS 5733
"CE" mark


Receptacle / Plug Configuration		Catalog Number	Description
Receptacle	Plug		
EU1-16R	EU1-16P	61100	6 European CEE 7, DIN 49440 "SCHUKO" 16 ampere 250 volt receptacles. 2 meter long cord with non-polarized "SCHUKO" plug. Illuminated double pole circuit breaker, 15 ampere.
UK1-13R	UK1-13P	61150	6 United Kingdom (BS 1363) 13 ampere 250 volt receptacles. 2 meter long cord with United Kingdom plug. Illuminated double pole circuit breaker, 12 ampere.
FR1-16R	EU1-16P	61200	6 French 16 ampere 250 volt receptacles. 2 meter long cord with non-polarized "SCHUKO" plug. Illuminated double pole circuit breaker, 15 ampere.
SW1-10R	SW1-10P	61250	6 Swiss 10 ampere 250 volt receptacles. 2 meter long cord with Swiss plug. Illuminated double pole circuit breaker, 10 ampere.
IT1-10R / IT2-16R	IT1-10P	61300	6 Italian 10 ampere 250 volt receptacles. 2 meter long cord with non-polarized 10 ampere 250 volt Italian plug. Illuminated double pole circuit breaker, 10 ampere.
AU1-10R	AU1-10P	61500	6 Australian 10 ampere 250 volt receptacles. 2 meter long cord with Australian plug. Illuminated double pole circuit breaker, 10 ampere.
NEMA 5-15R	NEMA 5-15P	61350	6 NEMA 5-15R 15 ampere 125 volt receptacles. 2 meter long cord with NEMA 5-15P plug. Illuminated double pole circuit breaker, 15 ampere.
NEMA 6-15R	NEMA 6-15P	61400	6 NEMA 6-15R 15 ampere 250 volt receptacles. 2 meter long cord with NEMA 6-15P plug. Illuminated double pole circuit breaker, 15 ampere.
IEC 60320 C-13	IEC 60320 C-14	61450	8 IEC 60320 C-13 10 ampere 250 volt receptacles. 2 meter long cord with IEC 60320 C-14 plug. Illuminated double pole circuit breaker, 10 ampere.
IEC 60320 C-19	IEC 60320 C-20	61550	8 IEC 60320 C-19 16 ampere 250 volt receptacles. 2 meter long cord with IEC 60320 C-20 plug. Illuminated double pole circuit breaker, 15 ampere.

NOTE: Variations are available including units with surge protection, RFI filters, GFCI (RCD) and special order combinations. Minimum lot quantity may apply to special variations.



19" HORIZONTAL RACK MOUNT
Multiple Outlet Power Strips
 2 Pole 3 Wire Grounding, "CE" MARK

(HEAVY DUTY)

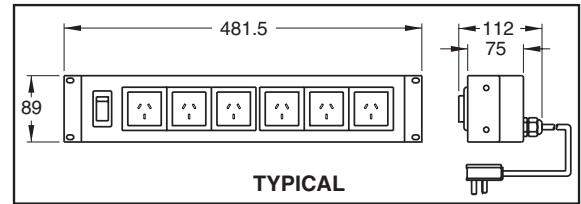











General Specification Data


Heavy duty steel enclosure, painted gray.
 Two meter long 1.5 mm² cord with matching plug.
 Double pole illuminated circuit breakers.

Technical Data

Receptacles meet applicable CCC, SII, BS 546A or AFSNIT standards.
 Test standard: BS 3456, manufactured to BS 5733
 "CE" mark

Receptacle / Plug Configuration		Catalog Number	Description
Receptacle	Plug		
 CH1-10R	 CH1-10P	61800	6 Chinese 10 ampere 250 volt receptacles. 2 meter long cord with 10 ampere 250 volt Chinese plug. Illuminated double pole circuit breaker, 10 ampere.
 CH2-16R	 CH2-16P	61900	6 Chinese 16 ampere 250 volt receptacles. 2 meter long cord with 16 ampere 250 volt Chinese plug. Illuminated double pole circuit breaker, 15 ampere.
 DE1-13R	 DE1-13P	61600	6 Danish 13 ampere 250 volt receptacles. 2 meter long cord with Danish plug. Illuminated double pole circuit breaker, 12 ampere.
 UK2-15R	 UK2-15P	61650	6 United Kingdom (BS 546A) 15/16 ampere 250 volt receptacles. 2 meter long cord with BS 546A plug. Illuminated double pole circuit breaker, 15 ampere.
 IS1-16R	 IS1-16P	61700	6 Israeli 16 ampere 250 volt receptacles. 2 meter long cord with Israeli plug. Illuminated double pole circuit breaker, 16 ampere.

12 outlet multi configuration power strip, 4U high, brackets reversible for surface or 19" rack mounting, 12 foot cord, 2.5 mm², exits bottom of enclosure



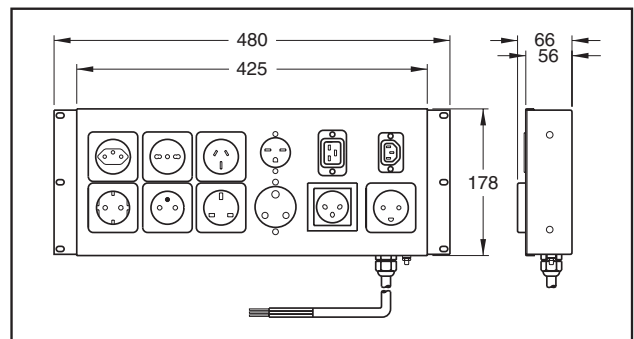


Receptacles - EU1-16R, FR1-16R, AU1-10R, AU2-15R, CH1-10R, UK1-13R, UK2-15R, IS1-16R, DE1-13R, SW1-10R, IT1-10R, IT2-16R, AR1-10R, NEMA 6-15R, IEC 60320 C-13, IEC 60320 C-19.

NOTE: Variations are available including units with surge protection, RFI filters, GFCI (RCD) and special order combinations. Minimum lot quantity may apply to special variations.



EUROPEAN "SCHUKO" POWER STRIPS
2 Pole 3 Wire Grounding
 16 Ampere 250 Volt (CEE-7, DIN 49440), "CE" MARK

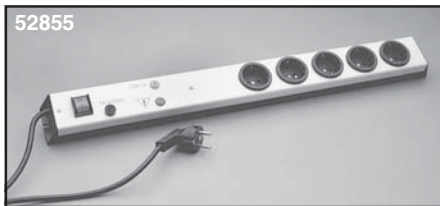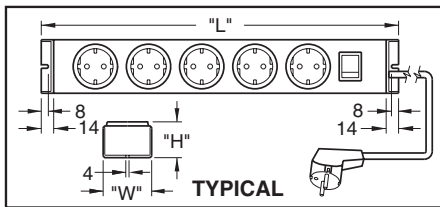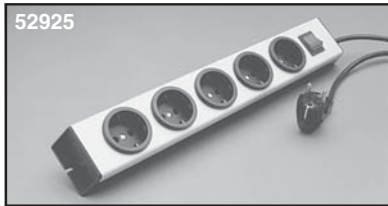

Description	"L"	"W"	"H"	Cat. No.
4 Outlet, without switch	315	60	44	52904
6 Outlet, without switch	433	60	44	52906
8 Outlet, without switch	553	60	44	52908
10 Outlet, without switch	673	60	44	52910
12 Outlet, without switch	793	60	44	52912
5 Outlet, with switch	403	60	44	52925
7 Outlet, with switch	523	60	44	52927
9 Outlet, with switch	643	60	44	52929
11 Outlet, with switch	763	60	44	52931
5 Outlet, with double pole 16 Ampere circuit breaker	528	60	44	52720*

Approvals - VDE, OVE, KEMA, SEMKO, NEMKO, SETI
 Catalog No. 52720 - VDE, OVE.

"CE" mark.

All units are supplied with 3 meters of 1.5 mm² cordage with non-polarized plug.

Units with switch have illuminated on / off rocker.

Color: Black base, silver cover. Cat. No. 52720 has orange cover.

All units accept "SCHUKO" CEE 7 and CEE 7-7 plugs.

All dimensions are in millimeters (1 mm = 0.039").

* Available with 7 outlets (No. 52721) and 9 outlets (No. 52722).

NOTE: Mating plugs are shown on page 60.

Surge Suppression / Filtered Strip

Cat. No. 52855 Description: 5 Outlet with filter and surge protection, 6 ampere 230 volt, fused, on / off switch, 1.5 meters of 1.5 mm² cordage with non-polarized plug, black / silver color. VDE, OVE and GS approved. "CE" mark.

52855-A Same as 52855 except rated 16 ampere 230 volt. Less fuse. 2 meter cord. "CE" mark.

See page 225 for dimensional data.

GFCI Outlet Strips

Cat. No. 52765-30 Description: 5 Outlet with double pole GFCI circuit breaker, 30 mA trip level, 1.5 meters of 1.5 mm² cordage with non-polarized plug, black / orange color. VDE and OVE approved. "CE" mark.

52765-10 Same as No. 52765-30 except with 10 mA trip level.

See page 224 for dimensional data.

19" Rack Mount Blank Plate

Cat. No. 52019 Description: Blank plate. Gray. Designed for mounting short length power strips to 19" center to center racks.

See page 223 for dimensional data.

NOTE: See pages 102-104 for rack mount series.



UNITED KINGDOM POWER STRIPS 2 Pole 3 Wire Grounding

13 Ampere 250 Volt (British Standard BS 1363A)



Description	"L"	"W"	"H"	Cat. No.
5 Outlet, with switch	403	71.5	43.5	52125
6 Outlet, without switch	429	71.5	43.5	52106
6 Outlet, with switch	463	71.5	43.5	52126

All units are supplied with 1.5 meters of cord with fused 13 ampere BS 1363A plug.



Units with switch have illuminated on / off rocker.

Color: Black base, silver cover.

"CE" mark.

All dimensions are in millimeters (1 mm = 0.039").

NOTE: Mating plugs are shown on page 65.

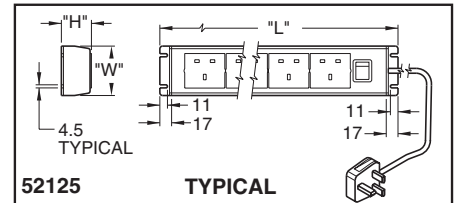
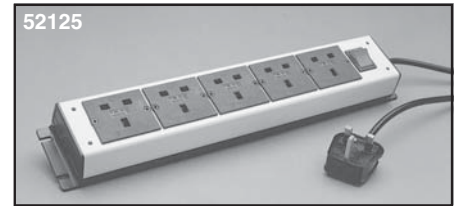


Surge Suppression / Filtered Strip

Cat. No.	Description
52150	4 Outlet with filter and surge protection, 13 ampere 250 volt, fused, with neon indicator light. 2.5 meters of cord with fused BS 1363A plug. White. "CE" mark All dimensions are in millimeters (1 mm = 0.039").

52160	6 Outlet with filter and surge protection, 13 ampere 250 volt, fused, with neon indicator light. 2.5 meters of cord with fused BS 1363A plug. White. "CE" mark
-------	---

See page 223 for dimensional data.

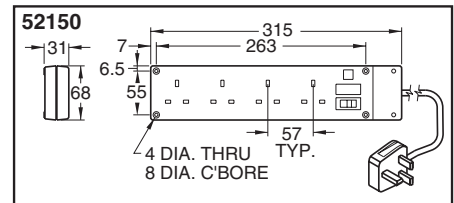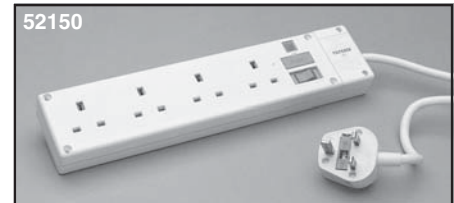


Fused With Pilot Light

Cat. No.	Description
52145	4 Outlet, white. Supplied without cord or plug. Equipped with 13 ampere fuse and neon indicator. All dimensions are in millimeters (1 mm = 0.039").



52170	4 Outlet, white. Supplied with 2 meter cord and plug. Equipped with 13 ampere fuse and neon indicator.
-------	---

See page 223 for dimensional data.

NOTE: See pages 102-104 for rack mount series.

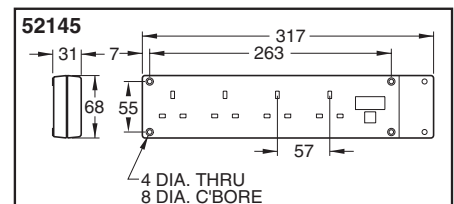

FRENCH POWER STRIPS
2 Pole 3 Wire Grounding
 16 Ampere 250 Volt, "CE" MARK

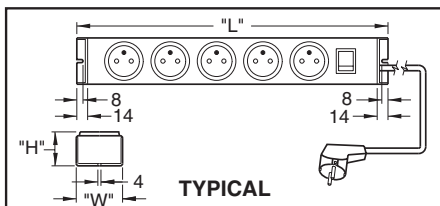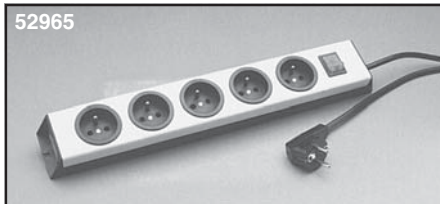

Description	"L"	"W"	"H"	Cat. No.
6 Outlet, without switch	433	60	44	52946
8 Outlet, without switch	553	60	44	52948
5 Outlet, with switch	403	60	44	52965*

Approval - UTE
 "CE" mark.

All units are supplied with 3 meters of 1.5 mm² cordage with non-polarized plug.

Units with switch have illuminated on / off rocker.

Color: Black base, silver cover.

All units accept "SCHUKO" CEE 7-7 plugs.



All dimensions are in millimeters (1 mm = 0.039").

* Available with filter and surge protection No. 52985

NOTE: Mating plugs are shown on page 63.

NOTE: See pages 102-104 for rack mount series.

SWISS POWER STRIPS
2 Pole 3 Wire Grounding
 10 Ampere 250 Volt (SEV 1011), "CE" MARK

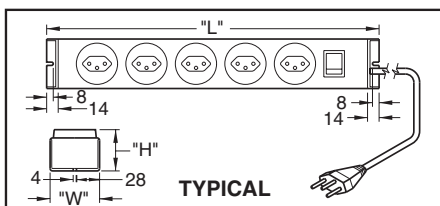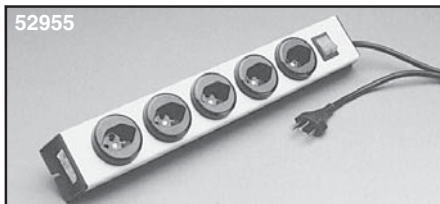

Description	"L"	"W"	"H"	Cat. No.
5 Outlet, with switch	403	60	50	52955
6 Outlet, without switch	433	60	50	55506

Approval - SEV
 "CE" mark.

All units are supplied with 3 meters of 1.5 mm² cordage with plug.

Unit with switch has illuminated on / off rocker.

Color: Black base, silver cover.

All dimensions are in millimeters (1 mm = 0.039").

NOTE: Mating plugs are shown on page 74.

NOTE: See pages 102-104 for rack mount series.



AUSTRALIAN POWER STRIPS 2 Pole 3 Wire Grounding

10 Ampere 250 Volt (AS / NZS 3112 1993)




Description	"L"	"W"	"H"	Cat. No.
6 Outlet, with circuit breaker	315	48	26.5	53326
8 Outlet, with circuit breaker	400	64	32.5	53328

Approval - EANSW

All units are supplied with 1 meter of cord with plug.

Color: White.


All dimensions are in millimeters (1 mm = 0.039").

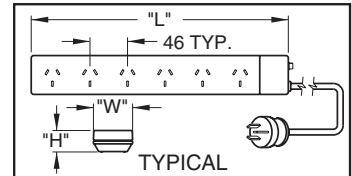

Surge Suppression / Filtered Strip

Cat. No.	Description
53340	6 Outlet with suppression filter and surge protection, 10 ampere 250 volt, circuit breaker, 1 meter of cord with plug and neon indicator light. White.

NOTE: Mating plugs are shown on page 69.

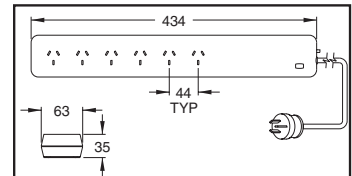

NOTE: See pages 102 - 104 for rack mount series.

ISRAELI POWER STRIPS 2 Pole 3 Wire Grounding

16 Ampere 250 Volt (SI 32)



Cat. No.	Description
56125	5 Outlet, with switch.
56106	6 Outlet, without switch.

Approval - SII

All units are supplied with 1.5 meters of cord with plug.




Unit with switch has illuminated on / off push button.

Color: White

All dimensions are in millimeters (1 mm = 0.039").

NOTE: Mating plugs are shown on page 76.

NOTE: See pages 102 - 104 for rack mount series.



© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 109


ITALIAN POWER STRIPS

2 Pole 3 Wire Grounding


10/16 Ampere 250 Volt (CEI 23-16 / VII)




IT1-10R



IT2-16R



54406



Cat. No.

54406

Description

6 Outlet dual configuration (accepts both 10 ampere and 16 ampere 250 volt plugs). White.

54408

8 Outlet dual configuration (accepts both 10 ampere and 16 ampere 250 volt plugs). White.

Approval - IMQ

Unit is supplied with 1.5 meters of cord with non-polarized 16 ampere 250 volt plug.

All dimensions are in millimeters (1 mm = 0.039").

NOTE: Mating plugs are shown on pages 72 and 73.

See pages 102-104 for rack mount series.

DANISH POWER STRIPS

2 Pole 3 Wire Grounding


13 Ampere 250 Volt (AFSNIT 107-2-D1) Previously rated 10 Ampere 250 Volt




DE1-13R



"EDP"

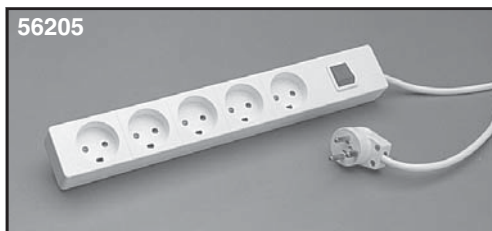

56205

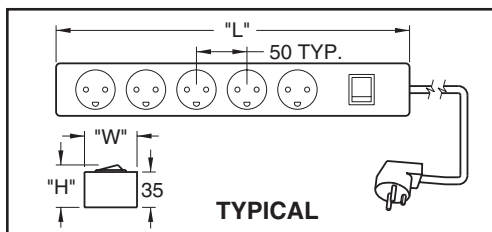

Description

5 Outlet, with on / off illuminated switch.

5 Outlet ("EDP" configuration), with on / off illuminated switch.

"L"

350

"W"

52

"H"

42

Cat. No.

56205

350

52

39

56305

Approval - DEMKO

All units are supplied with 1.5 meters of cord with plug.

Color: White.

All dimensions are in millimeters (1 mm = 0.039").


NOTE: See pages 102-104 for rack mount series.

NOTE: "EDP" outlet configuration accepts "EDP" plugs only for use on dedicated data processing circuits. See page 77 for mating plugs.

COMBINATION POWER STRIPS

2 Pole 3 Wire Grounding


16 Ampere 250 Volt, "CE" MARK



EU1-16R




FR1-16R



UK1-13R



SW1-10R

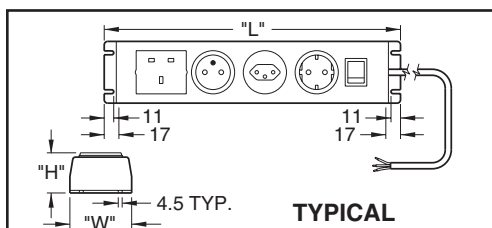

Description

4 Outlet

Euro, French, Swiss, U.K.

4 Outlet, with on / off switch

Euro, French, Swiss, U.K.

"L"

310

"W"

71.5

"H"

46.5

Cat. No.

58104

343

71.5

46.5

58204

Units are supplied with 1.5 meters of cord **less attachment plug.**

Color: Black base, silver cover.

"CE" mark.

All dimensions are in millimeters (1 mm = 0.039").





JAPANESE POWER STRIP
2 Pole 3 Wire Grounding
 15 Ampere 125 Volt (JIS 8303)



Cat. No.	Description
56504	4 Outlet. External grounding lug provides grounding for 2 pole 2 wire plugs with grounding lead. Gray.


Approvals - JET
 Unit is supplied with 3 meters of cord with 15 ampere 125 volt plug.
 All dimensions are in millimeters (1 mm = 0.039").

NOTE: Mating plugs are shown on page 82.

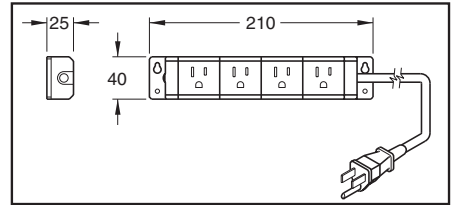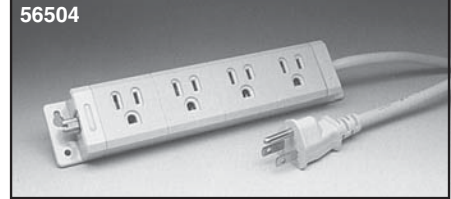

IEC 60320 C-13 POWER STRIPS
2 Pole 3 Wire Grounding
 10 Ampere 250 Volt, "CE" MARK



IEC 60320 C-13



Description	"L"	"W"	"H"	Cat. No.
4 Outlet, with fused inlet.	369	71.5	43.5	57104
6 Outlet, with fused inlet.	489	71.5	43.5	57106
8 Outlet, with fused inlet.	609	71.5	43.5	57108
4 Outlet, with switch and fused inlet.	403	71.5	51.5	57204
6 Outlet, with switch and fused inlet.	523	71.5	51.5	57206
8 Outlet, with switch and fused inlet.	643	71.5	51.5	57208

Input power is supplied through any American or International cord set with an IEC 60320 C-13 connector. See **pages 14-36** for mating cord sets and plugs. See pages 128-133 for rewirable plugs/connectors. Equipped with 10 ampere 250 volt replaceable fuse and spare fuse. Units with switch have illuminated on / off rocker. Color: Black base, silver cover. "CE" mark.

NOTE: See pages 102-104 for rack mount series.

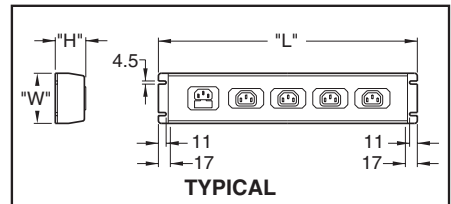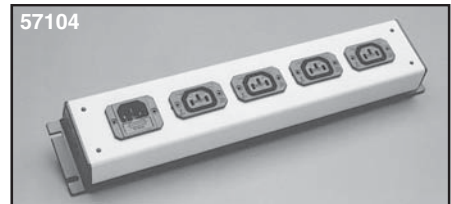

UNITED KINGDOM POWER STRIP
2 Pole 3 Wire Grounding

15 Ampere 250 Volt (BS 546A), 16 Ampere 250 Volt (SABS 164)



Cat. No.	Description
52205	5 Outlet. Circuit breaker, pilot light and 2 foot long cord with plug. White. 15 ampere 250 volt. 2 pole 3 wire grounding. Approval: SABS See page 188 for dimensional data. NOTE: Mating plugs are shown on page 67.

NOTE: See pages 102-104 for rack mount series.



ARGENTINE POWER STRIP

2 Pole 3 Wire Grounding

10 Ampere 250 Volt



AR1-10R




Cat. No.
84104



Description
4 outlets with circuit breaker and pilot light. White.
Five meter long cord with plug.

Approvals - IRAM
All dimensions are in millimeters (1 mm = 0.039").

NOTE: Mating plugs are shown on page 78.

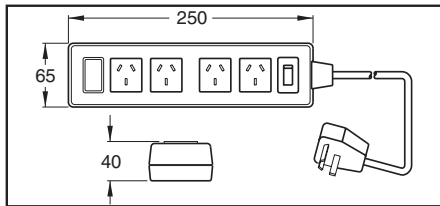

IEC 60320 C-13 TYPE
Multiple Outlet Power Strips
 2 Pole 3 Wire Grounding, "CE" MARK

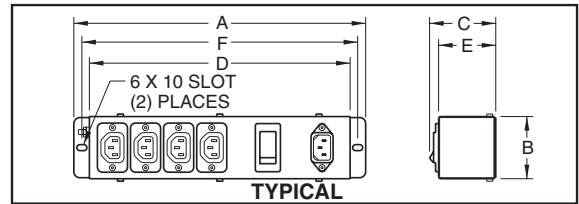

General Specification Data

Heavy duty steel enclosure, painted gray.
 Illuminated double pole circuit breaker.
 Designed for use with IEC 60320 C-13 detachable cord sets and IEC 60320 C-14 jumper cords.

Technical Data

IEC 60320 C-13 outlets. IEC 60320 C-14 inlets.
 Rated 10 ampere 250 volts AC. Shuttered contacts.
 Maximum current rating 10 ampere AC. "CE" mark.
 Test standard: BS 3456, manufactured to BS 5733.

Description



- 4 outlet**, 10 ampere illuminated double pole circuit breaker.
- 6 outlet**, 10 ampere illuminated double pole circuit breaker.
- 8 outlet**, 10 ampere illuminated double pole circuit breaker.
- 4 outlet**, 10 ampere illuminated double pole circuit breaker, R.F. filter, surge protection.
- 6 outlet**, 10 ampere illuminated double pole circuit breaker, R.F. filter, surge protection.
- 8 outlet**, 10 ampere illuminated double pole circuit breaker, R.F. filter, surge protection.

Catalog Number

- 62100
- 62150
- 62200
- 62250
- 62300
- 62350

	Dimensional Data (mm)					
	"A"	"B"	"C"	"D"	"E"	"F"
62100	291	62	66	260	57	275
62150	354	62	66	323	57	338
62200	416	62	66	385	57	400
62250	370	62	66	339	57	354
62300	436	62	66	405	57	420
62350	503	62	66	472	57	487

R.F. FILTER TECHNICAL SPECIFICATION			
Line frequency	0 to 400 Hz	The filters are fitted with ZNR voltage transients	
Operating voltage	115 to 250 volts a.c.		
Rated current	10 amps		
Insulation resistance	6000M (100 volts d.c.)		
Leakage current	2x0.21 mA (250 volts 50 Hz)		
Typical attenuation	75 dB (100 kHz to 100 mHz)		
Earth choke	0.4 mH		
Climatic category	IEC 68 25/85/21 DIN 40040		
Temperature range	-25°C to +85°C		
		Standard spec. Z280G	
		Max. cont. volts ac rms @ 25°C	320
		Max. cont. volts dc @ 25°C	416
		Varistor V min @ 1mA	450
		Energy joules 10/1000	140
		Clamping volt @ 100 amps	825
		m watts cont.	800

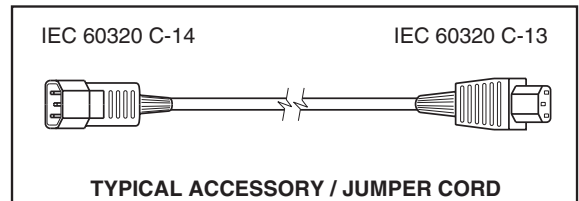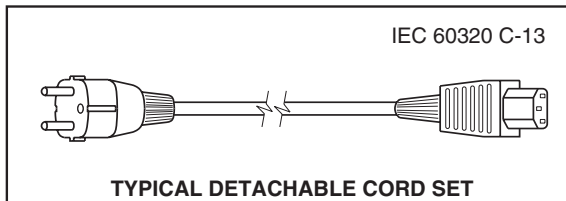


NOTE: See pages 14 - 32 for a complete listing of international and domestic detachable cord sets.



NOTE: See pages 34 - 36 for a complete listing of accessory and jumper power cords.



IEC 60320 C-19 TYPE
Multiple Outlet Power Strips
 2 Pole 3 Wire Grounding, "CE" MARK



IEC 60320 C-19

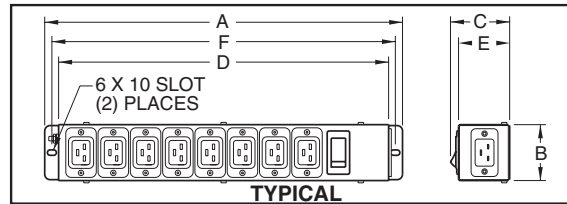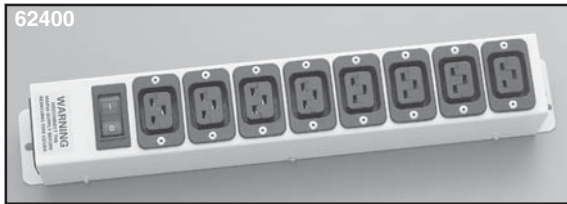

General Specification Data

Heavy duty steel enclosure, painted gray.
 Illuminated double pole circuit breaker.
 Designed for use with IEC 60320 C-19 detachable cord sets and IEC 60320 C-20 jumper cords.

Technical Data

IEC 60320 C-19 outlets. IEC 60320 C-20 inlet.
 Rated 16 ampere 250 volts AC.
 "CE" mark.
 Test standard: BS 3456, manufactured to BS 5733.

Description


8 outlet, 15 ampere illuminated double pole circuit breaker.

Catalog Number


62400

Dimensional Data (mm)

"A"	"B"	"C"	"D"	"E"	"F"
399	62	66	368	57	383

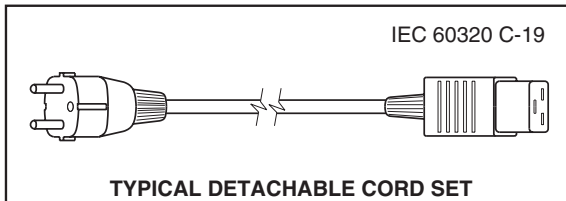

NOTE: See pages 14 - 32 for a complete listing of international and domestic detachable cord sets.

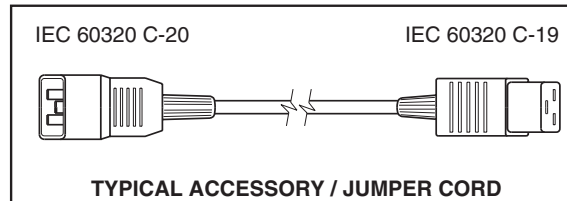

NOTE: See pages 38 and 39 for a complete listing of accessory and jumper power cords.

