

INTERNATIONAL



IEC 60309 UL / CSA / VDE APPROVED WIRING DEVICES












© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 169

IEC 60309 DEVICES, IP 44, (6H)
2 Pole 3 Wire Grounding
 20 Ampere 250 Volt A.C. UL & CSA
 16 Ampere 230 Volt A.C. European*

• **UL, CSA & EUROPEAN APPROVALS**
 • **"CE" MARK**

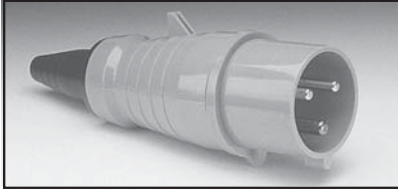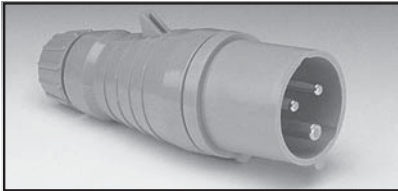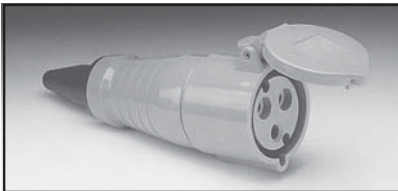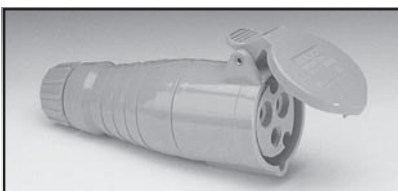

	Cat. No.	Approvals	Drawing	Description
	888-21001	3, 4, 13, 14, 17, 20, 22	Pg. 253	Splashproof cable mounting plug. Internal cord grip design. Nylon (Polyamid 6) body. Blue color.
	888-2126	3, 20, 22	Pg. 254	Splashproof cable mounting plug. Internal cord grip and compression cord grip / strain relief. Nylon (Polyamid 6) body. Blue color.
	888-31001	3, 4, 13, 14, 17, 20, 22	Pg. 255	Splashproof cable mounting connector. Internal cord grip design. Nylon (Polyamid 6) body. Blue color.
	888-3126	3, 20, 22	Pg. 255	Splashproof cable mounting connector. Internal cord grip and compression cord grip / strain relief. Nylon (Polyamid 6) body. Blue color.
	888-1217	3, 17, 20, 22	Pg. 252	Splashproof panel mount receptacle. Angle type. Blue color.
	888-410306	3, 4, 9, 14, 17, 18, 20, 22	Pg. 256	Splashproof panel mount receptacle. Straight type. Blue color.
	888-6136	3, 17, 20	Pg. 256	Splashproof panel mount inlet. Straight type. Blue color. NOTE: Locking tab for mating connector is not provided on this inlet.
	888-611306	3, 7, 9, 14, 17, 18, 20, 22	Pg. 256	Splashproof panel mount inlet. Angle type. Locking tab for mating connector is provided. Blue color.

* **NOTE: Rated 16 ampere 200-250 volt. Europe is changing to 230 volts.**

Manufactured to:
 IEC 60309-1, IEC 304-2, DIN 49462/63,
 VDE 0623, CEE 17, BS 4343, EN 60309

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE(JET) 6.EANSW(DFT) 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI



IEC 60309 DEVICES, IP 44, (6H) 2 Pole 3 Wire Grounding

30 Ampere 250 Volt A.C. UL & CSA
32 Ampere 230 Volt A.C. European *

• UL, CSA & EUROPEAN
APPROVALS
• "CE" MARK




PLUG




OUTLET / CONN.

Description	Cat. No.	Approvals	Drawing
Splashproof cable mounting plug. Internal cord grip design. Nylon (Polyamid 6) body. Blue color.	888-21013	3, 20, 22	Pg. 253
Splashproof cable mounting plug. Internal cord grip and compression cord grip / strain relief. Nylon (Polyamid 6) body. Blue color.	888-2138	3, 20, 22	Pg. 254
Splashproof cable mounting connector. Internal cord grip design. Nylon (Polyamid 6) body. Blue color.	888-31013	3, 20, 22	Pg. 255
Splashproof cable mounting connector. Internal cord grip and compression cord grip / strain relief. Nylon (Polyamid 6) body. Blue color.	888-3138	3, 20, 22	Pg. 255
Splashproof panel mount receptacle. Angle type. Blue color.	888-1229	3, 20, 22	Pg. 253
Splashproof panel mount receptacle. Straight type. Blue color.	888-13007	3, 20, 24	Pg. 253
Splashproof panel mount inlet. Straight type. Blue color. NOTE: Locking tab for mating connector is not provided on this inlet.	888-6236	3, 17, 20	Pg. 256
Splashproof panel mount inlet. Angle type. Locking tab for mating connector is provided. Blue color.	888-631306	3, 14, 18, 20, 24	Pg. 256

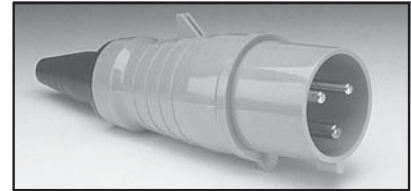


888-21013

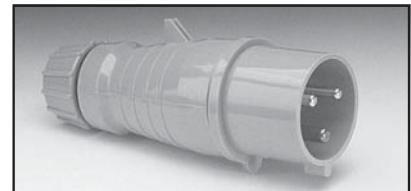


888-2138




888-31013

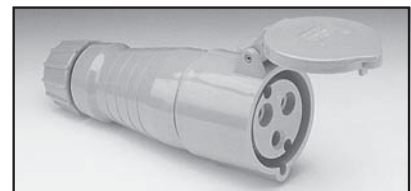


888-3138



888-1229



888-13007



888-6236



888-631306

Manufactured to:
IEC 60309-1, IEC 304-2, DIN 49462/63,
VDE 0623, CEE 17, BS 4343, EN 60309

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE(JET) 6.EANSW(DFT) 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA
13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI




© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com







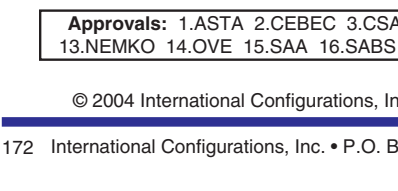
International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 171

**IEC 60309 DEVICES, IP 44, (6H)
2 Pole 3 Wire Grounding**

60 Ampere 125/250 Volt A.C. UL & CSA
63 Ampere 230 Volt A.C. European *

• UL, CSA & EUROPEAN
APPROVALS
• "CE" MARK



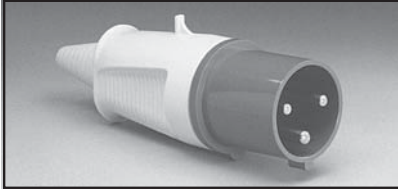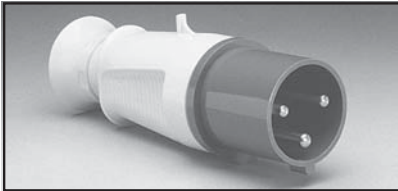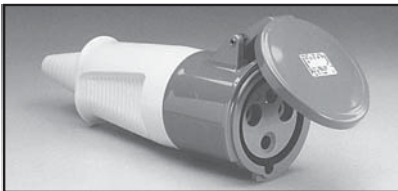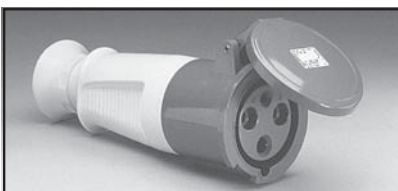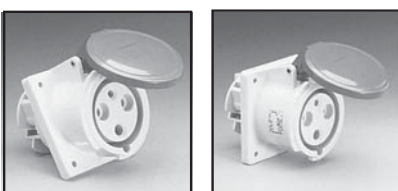	Cat. No.	Approvals	Drawing	Description
	888-260306	3, 14, 18, 20, 24	Pg. 254	Splashproof cable mounting plug. Internal cord grip design. Nylon (Polyamid 6) body. Blue color.
	888-261306	3, 18, 20, 24	Pg. 254	Splashproof cable mounting plug. Internal cord grip and compression cord grip / strain relief. Nylon (Polyamid 6) body. Blue color.
	888-360306	3, 14, 18, 20, 24	Pg. 255	Splashproof cable mounting connector. Internal cord grip design. Nylon (Polyamid 6) body. Blue color.
	888-361306	3, 20, 24	Pg. 256	Splashproof cable mounting connector. Internal cord grip and compression cord grip / strain relief. Nylon (Polyamid 6) body. Blue color.
	888-560306	3, 18, 20	Pg. 256	Splashproof panel mount receptacle. Angle type. Blue color.
	888-460306	3, 20, 24	Pg. 256	Splashproof panel mount receptacle. Straight type. Blue color.
	888-661306	3, 20, 24	Pg. 257	Splashproof panel mount inlet. Angle type. Locking tab for mating connector is provided. Blue color.
				* NOTE: Rated 63 ampere 200-250 volt. Europe is changing to 230 volts.
				Manufactured to: IEC 60309-1, IEC 304-2, DIN 49462/63, VDE 0623, CEE 17, BS 4343, EN 60309

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE(JET) 6.EANSW(DFT) 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI

© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

172 International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985



IEC 60309 DEVICES, IP 44, (6H) 4 Pole 5 Wire Grounding

30 Ampere 250 Volt A.C. UL & CSA
32 Ampere 230/400 Volt A.C. European *

• UL, CSA & EUROPEAN APPROVALS
• "CE" MARK




PLUG




OUTLET / CONN.

Description	Cat. No.	Approvals	Drawing
Splashproof cable mounting plug. Internal cord grip design. Nylon (Polyamid 6) body. Red color.	888-204	3, 4, 7, 12, 13, 14, 17, 22, 20†	Pg. 253
Splashproof cable mounting plug. Internal cord grip and compression cord grip / strain relief. Nylon (Polyamid 6) body. Red color.	888-231	2, 3, 4, 7, 9, 14, 17, 18, 22, 20†	Pg. 254
Splashproof cable mounting connector. Internal cord grip design. Nylon (Polyamid 6) body. Red color.	888-304	4, 7, 12, 13, 14, 17, 22, 20†	Pg. 254
Splashproof cable mounting connector. Internal cord grip and compression cord grip / strain relief. Nylon (Polyamid 6) body. Red color.	888-331	2, 3, 4, 7, 9, 14, 17, 18, 22, 20†	Pg. 255
Splashproof panel mount receptacle. Angle type. Red color.	888-1239	3, 17, 22, 20†	Pg. 253
Splashproof panel mount inlet. Angle type. Locking tab for mating connector is provided. Red color.	888-2769	3, 22, 20†	Pg. 254

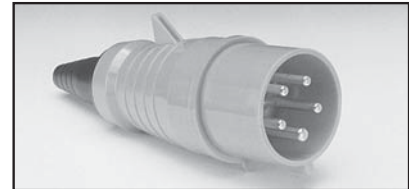


888-204

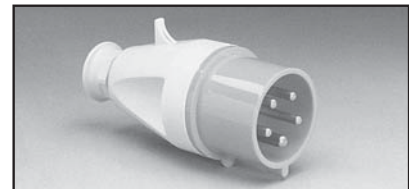

888-231



888-304

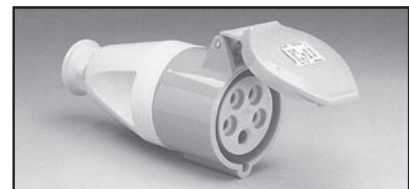

888-331



888-1239



888-2769

* NOTE: Rated 32 ampere 200-240 /
346-415 volt. Europe is changing to
230 volts.

† = U.L. Classified

Manufactured to:
IEC 60309-1, IEC 304-2, DIN 49462/63,
VDE 0623, CEE 17, BS 4343, EN 60309

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE(JET) 6.EANSW(DFT) 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA
13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI



© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 173


IEC 60309 DEVICES, WATERTIGHT IP 67, (6H) 4 Pole 5 Wire Grounding

60 Ampere 250 Volt A.C. UL & CSA
63 Ampere 230/400 Volt A.C. European *


UL, CSA & EUROPEAN
APPROVALS




PLUG



OUTLET / CONN.

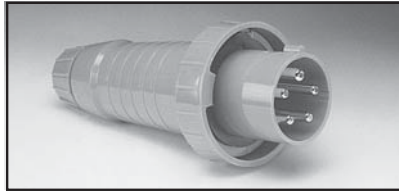

888-2189

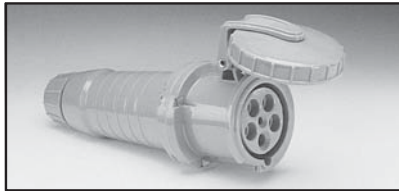

888-3124



888-129



888-27017

Cat. No.	Approvals	Drawing	Description
888-2189	3, 22, 20†	Pg. 254	Watertight / splashproof cable mounting plug. Internal cord grip and compression strain relief. Nylon (Polyamid 6) body. Red color.
888-3124	3, 22, 20†	Pg. 255	Watertight / splashproof cable mounting connector. Internal cord grip and compression strain relief. Nylon (Polyamid 6) body. Red color.
888-129	3, 22, 20†	Pg. 253	Watertight / splashproof panel mount receptacle. Angle type. Nylon (Polyamid 6) body. Red color.
888-27017	3, 22, 20†	Pg. 254	Watertight / splashproof panel mount inlet. Angle type. Nylon (Polyamid 6) body. Red color.

* NOTE: Rated 63 ampere 200-240 / 346-415 volt. Europe is changing to 230 volts.

† = U.L. Classified

Manufactured to:
IEC 60309-1, IEC 304-2, DIN 49462/63,
VDE 0623, CEE 17, BS 4343, EN 60309

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE(JET) 6.EANSW(DFT) 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI

© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

174 International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985




IEC 60309 DEVICES, WATERTIGHT IP 67, (6H) 4 Pole 5 Wire Grounding

100 Ampere 250 Volt A.C. UL & CSA
125 Ampere 230/400 Volt A.C. European *

**UL, CSA & EUROPEAN
APPROVALS**




PLUG




OUTLET / CONN.

Description	Cat. No.	Approvals	Drawing
Watertight / splashproof cable mounting plug. Internal cord grip and compression strain relief. Nylon (Polyamid 6) body. Red color.	888-2199	3, 22, 20†	Pg. 254
Watertight / splashproof cable mounting connector. Internal cord grip and compression strain relief. Nylon (Polyamid 6) body. Red color.	888-3199	3, 22, 20†	Pg. 255
Watertight / splashproof panel mount receptacle. Angle type. Nylon (Polyamid 6) body. Red color.	888-12108	3, 22, 20†	Pg. 252
Watertight / splashproof panel mount inlet. Angle type. Nylon (Polyamid 6) body. Red color.	888-679	7, 18, 22, 20†	Pg. 257

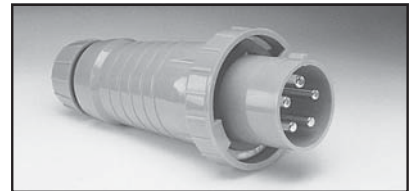

888-2199

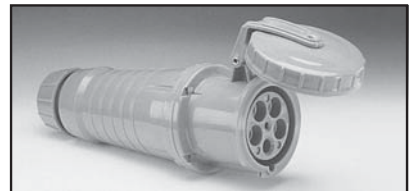

888-3199



888-12108



888-679

* **NOTE: Rated 125 ampere 200-240 / 346-415 volt. Europe is changing to 230 volts.**

† = U.L. Classified

Manufactured to:
IEC 60309-1, IEC 304-2, DIN 49462/63,
VDE 0623, CEE 17, BS 4343, EN 60309

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE(JET) 6.EANSW(DFT) 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI



© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 175

IEC 60309 DEVICES, IP 44, (4H)

2 Pole 3 Wire Grounding

20 Ampere 125 Volt A.C. UL/CSA, 16 ampere 100-130V (VDE)

30 Ampere 125 Volt A.C. UL/CSA, 32 ampere 100-130V (VDE)



PLUG



CONNECTOR

		Cat. No.	Approvals	Drawing	Description
	888-21000	888-21000	3, 20,22	Pg. 253	20 amp. 125V, UL/CSA, 16 amp. 100-130V (VDE) CE Mark Splashproof cable mounting plug. Internal cord grip design. Nylon (Polyamid 6) body. Yellow color.
	888-31000	888-31000	3, 20,22	Pg. 255	20 amp. 125V, UL/CSA, 16 amp.100-130V (VDE) CE Mark Splashproof cable mounting connector. Internal cord grip design. Nylon (Polyamid 6) body. Yellow color.
	888-1216	888-1216	3, 20,22	Pg. 252	20 amp. 125V, UL/CSA, 16 amp. 100-130V (VDE) CE Mark Splashproof panel mount receptacle. Angle type. Yellow color.
	888-611316	888-611316	3, 20	Pg. 256	20 ampere 125 volt, UL/CSA Only. Splashproof panel mount inlet. Angle type. Locking tab for mating connector is provided. Yellow color.
	888-21012	888-21012	3, 20,22	Pg. 253	30 amp. 125V, UL/CSA, 32 amp. 100-130V (VDE) CE Mark Splashproof cable mounting plug. Internal cord grip design. Nylon (Polyamid 6) body. Yellow color.
	888-31012	888-31012	3, 20,22	Pg. 255	30 amp. 125V, UL/CSA, 32 amp. 100-130V (VDE) CE Mark Splashproof cable mounting connector. Internal cord grip design. Nylon (Polyamid 6) body. Yellow color.
	888-1228	888-1228	3, 20	Pg. 253	30 ampere 125 volt, UL/CSA Only. Splashproof panel mount receptacle. Angle type. Yellow color.
	888-631316	888-631316	3, 20	Pg. 256	30 ampere 125 volt, UL/CSA Only. Splashproof panel mount inlet. Angle type. Locking tab for mating connector is provided. Yellow color.

Manufactured to:
IEC 60309-1, IEC 304-2, DIN 49462/63,
VDE 0623, CEE 17, BS 4343, EN 60309

Approvals: 1.ASTA 2.CEBEC 3.CSA 4.DEMKO 5.PSE(JET) 6.EANSW(DFT) 7.FI 8.GS 9.IMQ 10.JET 11.JIS 12.KEMA 13.NEMKO 14.OVE 15.SAA 16.SABS 17.SEMKO 18.SEV 19.SII 20.UL 21.UTE 22.VDE 23.ISO 24.CCC 25.IRAM 26.BSI

