

INTERNATIONAL IEC 60320 C-13 ADAPTERS


2 Pole 3 Wire Grounding




IEC 60320 C-14

For Computers and Electronic Equipment - Converts European Plugs,
NEMA Plugs, IEC 60320 C-5 and C-7 Plugs to IEC 60320 C-13 Outlets

Connector Style "A" (Straight)

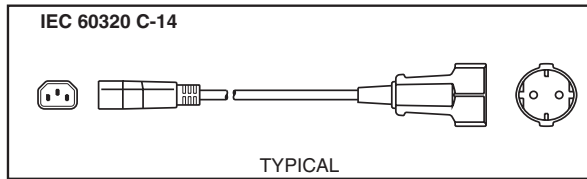

Connector Style "B" (Angled)

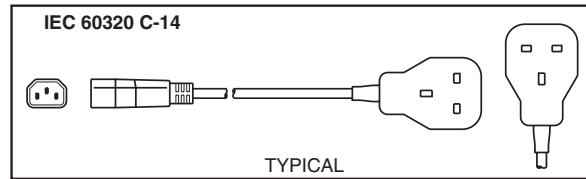

General Specification Data (Int'l.)

Rating: 10 Ampere 250 Volt
International Cord Spec.: H05VV-F3G 1.0mm²
Cord Set Length: 12"

Material: PVC, Jacket Color Black
Conductor Color Code: Brown, Blue, Green/Yellow

PLUG CONFIG.	PLUG ID.	PLUG STANDARD	CONNECTOR CONFIG.	CONN. ID.	CONNECTOR STANDARD	CONN. STYLE	CATALOG NUMBER
	C-14	IEC 60320		EU1-16R	CEE 7	"A"	30600 ⁽¹⁾
	C-14	IEC 60320		FR1-16R	CEE 7 Variation	"A"	30605
	C-14	IEC 60320		UK1-13R	BS 1363A	"B"	30610
	C-14	IEC 60320		UK2-15R	BS 546A	"B"	30620
	C-14	IEC 60320		AU2-15R	AS / NZS 3112	"A"	30630
	C-14	IEC 60320		SW1-10R	SEV 1011	"A"	30640
	C-14	IEC 60320		IT2-16R	CEI 23-16	"A"	30650 ⁽¹⁾
	C-14	IEC 60320		DE1-10R	AST 107	"A"	30660
	C-14	IEC 60320		IS1-16R	SI 32	"B"	30670
	C-14	IEC 60320		AR1-10R	AS/NZS 3112	"A"	30635 ⁽²⁾
	C-14	IEC 60320		CH1-10R	AS/NZS 3112	"A"	30630
	C-14	IEC 60320		IEC 60320	C-5	"A"	90040
	C-18	IEC 60320		IEC 60320	C-7	"A"	90060 ⁽³⁾
	C-14	IEC 60320		NEMA 5-15R	UL 498	"A"	30680 ⁽⁴⁾⁽⁵⁾
	C-14	IEC 60320		NEMA 6-15R	UL 498	"A"	30690 ⁽⁵⁾
	C-14	IEC 60320		NEMA L5-15R	UL 498	"A"	30685 ⁽⁴⁾⁽⁶⁾
	C-14	IEC 60320		NEMA L6-15R	UL 498	"A"	30695 ⁽⁶⁾

- (1) Non-polarized configuration
- (2) Argentine connector has the same configuration as the Australian/Chinese type of socket, except the line and neutral conductors are reversed.
- (3) Non-grounding 2 pole 2 wire
- (4) Use **only** with equipment designed for switching from 250 volts to 125 volts
- (5) 3 x 16 AWG conductors, SJT, 13 Ampere
- (6) 3 x 14 AWG conductors, SJT, 15 Ampere

