



IEC 60309 - CEE 17 IP44 Splashproof Plugs

VOLTAGE	AMPS	POLES	GROUND POSITION	CATALOG NO.	DIMENSIONS					
					A	AA	B	BB	C	CC
50/60 Hz	IEC 60309 BS 4343 SABS 1239 VDE 0623 DIN 49462/63									
100/130 V	16 A	2 P + E	4H	999-21000	48.5		161.5		125	
100/130 V	32 A	2 P + E	4H	999-21012	65		202		156.5	
100/130 V	63 A	2 P + E								
100/130 V	125 A	2 P + E								
200/250 V	16 A	2 P + E	6H	999-21001 (1)	48.5	51	161.5	132.5	125	82
200/250 V	16 A	3 P + E	9H	999-21004	56.5		172.5		136	
120/208-144/250 V	16 A	3 P + N + E	9H	999-21010	62		181		144.5	
200/250 V	32 A	2 P + E	6H	999-21013	65		202		156.5	
200/250 V	32 A	3 P + E	9H	999-21016	65		202		156.5	
120/208-144/250 V	32 A	3 P + N + E	9H	999-21022	70		202		156.5	
200/250 V	63 A	2 P + E								
200/250 V	63 A	3 P + E								
120/208-144/250 V	63 A	3 P + N + E								
200/250 V	125 A	2 P + E								
200/250 V	125 A	3 P + E								
120/208-144/250 V	125 A	3 P + N + E								
380/415 V	16 A	2 P + E	9H	999-21002	48.5		161.5		125	
380/415 V	16 A	3 P + E	6H	999-21005	56.5		172.5		136	
200/346-240/415 V	16 A	3 P + N + E	6H	999-203 (1)	62	62	181	148	144.5	94
380/415 V	32 A	2 P + E	9H	999-21014	65		202		156.5	
380/415 V	32 A	3 P + E	6H	999-21017	65		202		156.5	
200/346-240/415 V	32 A	3 P + N + E	6H	999-204	70		202		156.5	
380/415 V	63 A	2 P + E								
380/415 V	63 A	3 P + E								
200/346-240/415 V	63 A	3 P + N + E								
380/415 V	125 A	2 P + E								
380/415 V	125 A	3 P + E								
200/346-240/415 V	125 A	3 P + N + E								

1. Add suffix "-RA" for right angle design

All dimensions are in millimeters (1 mm = 0.039")

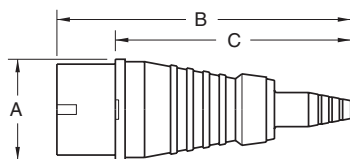

© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

