
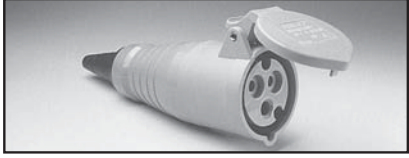


IEC 60309 - CEE 17 IP 44 Splashproof Connectors

VOLTAGE	AMPS	POLES	GROUND POSITION	CATALOG NO.	DIMENSIONS					
					A	AA	B	BB	C	CC
50/60 Hz	IEC 60309 BS 4343 SABS 1239 VDE 0623 DIN 49462/63									
100/130 V	16 A	2 P + E	4H	999-31000	49.5		170.5		64	
100/130 V	32 A	2 P + E	4H	999-31012	66		215.5		84.5	
100/130 V	63 A	2 P + E								
100/130 V	125 A	2 P + E								
200/250 V	16 A	2 P + E	6H	999-31001 (1)	49.5	54	170.5	139	64	77.5
200/250 V	16 A	3 P + E	9H	999-31004	56.5		184.5		72.5	
120/208-144/250 V	16 A	3 P + N + E	9H	999-31010	64		193		79.5	
200/250 V	32 A	2 P + E	6H	999-31013	66		215.5		84.5	
200/250 V	32 A	3 P + E	9H	999-31016	66		215.5		84.5	
120/208-144/250 V	32 A	3 P + N + E	9H	999-31022	72		215.5		91	
200/250 V	63 A	2 P + E								
200/250 V	63 A	3 P + E								
120/208-144/250 V	63 A	3 P + N + E								
200/250 V	125 A	2 P + E								
200/250 V	125 A	3 P + E								
120/208-144/250 V	125 A	3 P + N + E								
380/415 V	16 A	2 P + E	9H	999-31002	49.5		170.5		64	
380/415 V	16 A	3 P + E	6H	999-31005	56.5		184.5		72.5	
200/346-240/415 V	16 A	3 P + N + E	6H	999-303	64		193		79.5	
380/415 V	32 A	2 P + E	9H	999-31014	66		215.5		84.5	
380/415 V	32 A	3 P + E	6H	999-31017	66		215.5		84.5	
200/346-240/415 V	32 A	3 P + N + E	6H	999-304	72		215.5		91	
380/415 V	63 A	2 P + E								
380/415 V	63 A	3 P + E								
200/346-240/415 V	63 A	3 P + N + E								
380/415 V	125 A	2 P + E								
380/415 V	125 A	3 P + E								
200/346-240/415V	125 A	3 P + N + E								

1. Add suffix "-RA" for right angle design

All dimensions are in millimeters (1 mm = 0.039")

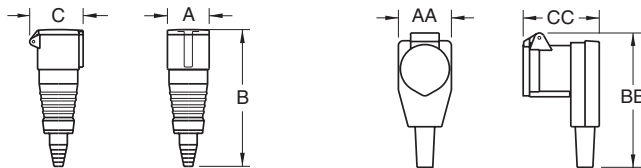

© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

