
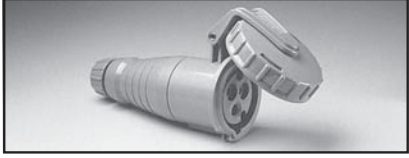



IEC 60309 - CEE 17 IP 67 Watertight Connectors

50/60 Hz	IEC 60309 BS 4343 SABS 1239 VDE 0623 DIN 49462/63								
	VOLTAGE	AMPS	POLES	GROUND POSITION	CATALOG NO.	STYLE NUMBER	A	DIMENSIONS B	C
100/130 V	16 A	2 P + E	4H	999-3156	1	69	151.5	81	
100/130 V	32 A	2 P + E	4H	999-3168	1	91	192.5	105	
100/130 V	63 A	2 P + E	4H	999-3180	2	240	112	37	
100/130 V	125 A	2 P + E	4H	999-3190	2	300	126	50	
200/250 V	16 A	2 P + E	6H	999-3157	1	69	151.5	81	
200/250 V	16 A	3 P + E	9H	999-3160	1	77	163	89	
120/208-144/250 V	16 A	3 P + N + E	9H	999-3166	1	85	172	97	
200/250 V	32 A	2 P + E	6H	999-3169	1	91	192.5	105	
200/250 V	32 A	3 P + E	9H	999-3172	1	91	192.5	105	
120/208-144/250 V	32 A	3 P + N + E	9H	999-3178	1	98	193.5	112	
200/250 V	63 A	2 P + E	6H	999-3181	2	240	112	37	
200/250 V	63 A	3 P + E	9H	999-3184	1	103	289	115	
120/208-144/250 V	63 A	3 P + N + E	9H	999-3188	1	103	289	115	
200/250 V	125 A	2 P + E	6H	999-3191	2	300	126	50	
200/250 V	125 A	3 P + E	9H	999-3194	1	121	333.5	136	
120/208-144/250 V	125 A	3 P + N + E	9H	999-3198	1	121	333.5	136	
380/415 V	16 A	2 P + E	9H	999-3158	1	69	151.5	81	
380/415 V	16 A	3 P + E	6H	999-3161	1	77	163	89	
200/346-240/415 V	16 A	3 P + N + E	6H	999-3167	1	85	172	97	
380/415 V	32 A	2 P + E	9H	999-3170	1	91	192.5	105	
380/415 V	32 A	3 P + E	6H	999-3173	1	91	192.5	105	
200/346-240/415 V	32 A	3 P + N + E	6H	999-3179	1	98	193.5	112	
380/415 V	63 A	2 P + E	9H	999-2339	2	240	112	36	
380/415 V	63 A	3 P + E	6H	999-3185	1	103	289	115	
200/346-240/415 V	63 A	3 P + N + E	6H	999-3124	1	103	289	115	
380/415 V	125 A	2 P + E	9H	999-2439	2	300	126	48	
380/415 V	125 A	3 P + E	6H	999-3195	1	121	333.5	136	
200/346-240/415 V	125 A	3 P + N + E	6H	999-3199	1	121	333.5	136	

All dimensions are in millimeters (1 mm = 0.039")



STYLE No. 1



STYLE No. 2



© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 183