
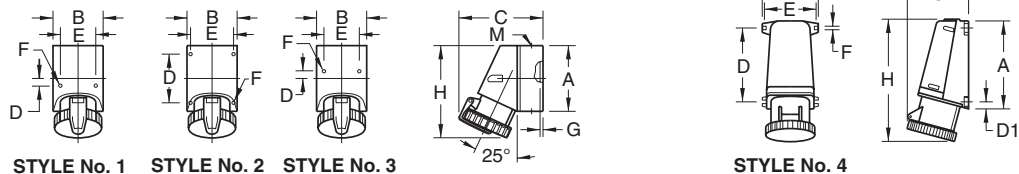


# IEC 60309 - CEE 17 IP 67 Watertight Receptacles

Wall Mount With Box

50/60 Hz	IEC 60309 BS 4343 SABS 1239 VDE 0623 DIN 49462/63															
	VOLTAGE	AMPS	POLES	GROUND POSITION	CATALOG NO.	STYLE NUMBER	A	B	C	D	D1	E	F	G	H	M
100/130 V	16 A	2 P + E	4H	999-1132	3	90	68	115	10.5	-	48	4.5	4	135	M20	
100/130 V	32 A	2 P + E														
100/130 V	63 A	2 P + E	4H	999-1156	4	193	122	130	157	19	109	6	-	270	-	
100/130 V	125 A	2 P + E	4H	999-1166	4	220	140	150	185	17	130	8	-	320	-	
200/250 V	16 A	2 P + E	6H	999-1133	3	90	68	115	10.5	-	48	4.5	4	135	M20	
200/250 V	16 A	3 P + E	9H	999-1136	1	125	90	132	10	-	68	5.3	4	169	M25	
120/208-144/250 V	16 A	3 P + N + E	9H	999-1142	1	125	90	139	10	-	68	5.3	4	167	M25	
200/250 V	32 A	2 P + E	6H	999-3227	1	125	90	150	10	-	68	5.3	4	176	M25	
200/250 V	32 A	3 P + E	9H	999-1148	1	125	90	150	10	-	68	5.3	4	176	M25	
120/208-144/250 V	32 A	3 P + N + E	9H	999-1154	1	125	90	156	10	-	68	5.3	4	178	M25	
200/250 V	63 A	2 P + E	6H	999-1157	4	193	122	130	157	19	109	6	-	270	-	
200/250 V	63 A	3 P + E	9H	999-1160	2	170	118	177	130	-	102	6	6	213	M32	
120/208-144/250 V	63 A	3 P + N + E	9H	999-1164	2	170	118	177	130	-	102	6	6	213	M32	
200/250 V	125 A	2 P + E	6H	999-1167	4	220	140	150	185	17	130	8	-	320	-	
200/250 V	125 A	3 P + E	9H	999-1170	4	220	140	150	185	17	130	8	-	320	-	
120/208-144/250 V	125 A	3 P + N + E														
380/415 V	16 A	2 P + E	9H	999-1134	3	90	68	115	10.5	-	48	4.5	4	135	M20	
380/415 V	16 A	3 P + E	6H	999-1137	1	125	90	132	10	-	68	5.3	4	169	M25	
200/346-240/415 V	16 A	3 P + N + E	6H	999-1043	1	125	90	139	10	-	68	5.3	4	167	M25	
380/415 V	32 A	2 P + E														
380/415 V	32 A	3 P + E	6H	999-1149	1	125	90	150	10	-	68	5.3	4	176	M25	
200/346-240/415 V	32 A	3 P + N + E	6H	999-1155	1	125	90	156	10	-	68	5.3	4	178	M25	
380/415 V	63 A	2 P + E														
380/415 V	63 A	3 P + E	6H	999-1161	2	170	118	177	130	-	102	6	6	213	M32	
200/346-240/415 V	63 A	3 P + N + E	6H	999-1112	2	170	118	177	130	-	102	6	6	213	M32	
380/415 V	125 A	2 P + E														
380/415 V	125 A	3 P + E	6H	999-1171	4	220	140	150	185	17	130	8	-	320	-	
200/346-240/415 V	125 A	3 P + N + E	6H	999-1175	4	220	140	150	185	17	130	8	-	320	-	

All dimensions are in millimeters (1 mm = 0.039")



STYLE No. 1    STYLE No. 2    STYLE No. 3

STYLE No. 4



© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. [www.InternationalConfig.com](http://www.InternationalConfig.com)

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 189