
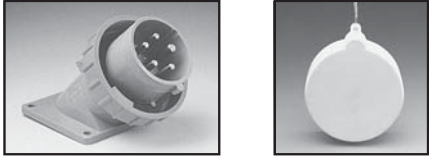


IEC 60309 - CEE 17
IP 67 Watertight Inlets
 Panel Mount, Angle Type


50/60 Hz	IEC 60309 BS 4343 SABS 1239 VDE 0623 DIN 49462/63														
	VOLTAGE	AMPS	POLES	GROUND POSITION	CATALOG NO.	STYLE NUMBER	A	B	C	DIMENSIONS				CLOSURE PLUG No.	
100/130 V	16 A	2 P + E	4H	999-71324	3	85	85	116	70	70	6.3	-	90	-	999-613
100/130 V	32 A	2 P + E	4H	999-72324	3	85	85	127	70	70	6.3	-	97	-	999-623
100/130 V	63 A	2 P + E	4H	999-27006	2	110	100	118	88	80	6.5	27	121	80	999-635
100/130 V	125 A	2 P + E	4H	999-2735	2	130	120	130	108	100	8	30	143	100	999-645
200/250 V	16 A	2 P + E	6H	999-71326	3	85	85	116	70	70	6.3	-	90	-	999-613
200/250 V	16 A	3 P + E	9H	999-71429	3	85	85	117	70	70	6.3	-	92	-	999-614
120/208-144/250 V	16 A	3 P + N + E	9H	999-2792	1	85	85	100	70	70	6.2	6	141	-	999-615
200/250 V	32 A	2 P + E	6H	999-72326 *	3	85	85	127	70	70	6.3	-	97	-	999-623
200/250 V	32 A	3 P + E	9H	999-72429	3	85	85	127	70	70	6.3	-	97	-	999-623
120/208-144/250 V	32 A	3 P + N + E	9H	999-27004	1	85	85	115	70	70	6	6	158	-	999-625
200/250 V	63 A	2 P + E	6H	999-27007	2	110	100	118	88	80	6.5	27	121	80	999-635
200/250 V	63 A	3 P + E	9H	999-27010	2	110	100	118	88	80	6.5	27	121	80	999-635
120/208-144/250 V	63 A	3 P + N + E	9H	999-27016	1	114	114	158	90	90	6.5	6	213	-	999-635
200/250 V	125 A	2 P + E	6H	999-2736	2	130	120	130	108	100	8	30	143	100	999-645
200/250 V	125 A	3 P + E	9H	999-2739	2	130	120	130	108	100	8	30	143	100	999-645
120/208-144/250 V	125 A	3 P + N + E	9H	999-7459	2	130	120	130	108	100	8	30	143	100	999-645
380/415 V	16 A	2 P + E	9H	999-71329	3	85	85	116	70	70	6.3	-	90	-	999-613
380/415 V	16 A	3 P + E	6H	999-71426	3	85	85	117	70	70	6.3	-	92	-	999-614
200/346-240/415 V	16 A	3 P + N + E	6H	999-2793	1	85	85	100	70	70	6.2	6	141	-	999-615
380/415 V	32 A	2 P + E	9H	999-72329	3	85	85	127	70	70	6.3	-	97	-	999-623
380/415 V	32 A	3 P + E	6H	999-72426	3	85	85	127	70	70	6.3	-	97	-	999-623
200/346-240/415 V	32 A	3 P + N + E	6H	999-27005	1	85	85	115	70	70	6	6	158	-	999-625
380/415 V	63 A	2 P + E	9H	999-7339	2	110	100	118	88	80	6.5	27	121	80	999-635
380/415 V	63 A	3 P + E	6H	999-27011	2	110	100	118	88	80	6.5	27	121	80	999-635
200/346-240/415 V	63 A	3 P + N + E	6H	999-27017	2	110	100	118	88	80	6.5	27	121	80	999-635
380/415 V	125 A	2 P + E	9H	999-7439	2	130	120	130	108	100	8	30	143	100	999-645
380/415 V	125 A	3 P + E	6H	999-2740	2	130	120	130	108	100	8	30	143	100	999-645
200/346-240/415 V	125 A	3 P + N + E	6H	999-2744	2	130	120	130	108	100	8	30	143	100	999-645

All dimensions are in millimeters (1 mm = 0.039")


* = Discontinued. Call sales office for substitute.



STYLE No. 1

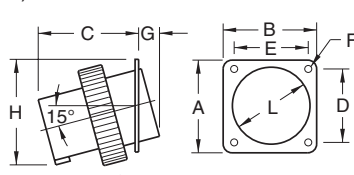

STYLE No. 2

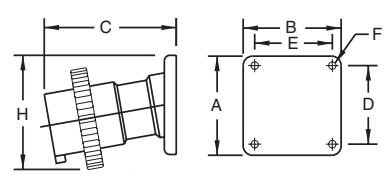

STYLE No. 3



© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 193