

CAT. No.

72135


UK, BRITISH, UNITED KINGDOM 13 AMPERE 250 VOLT DOWN ANGLE PLUG (UK1-13P), BS 1363A TYPE G PLUG, 13 AMPERE FUSED, 2 POLE-3 WIRE GROUNDING (2P+E), MAX. CORD O.D. = 0.433" (11mm). WHITE.

APPROVALS	BSI <input checked="" type="checkbox"/>	ASTA <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>	
STANDARDS	BS 1363A <input checked="" type="checkbox"/>	BS 1362 <input checked="" type="checkbox"/>


ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 11 DIA (0.433")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)


CORDAGE PREPARATION			
CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	35	6
BLUE	NEUTRAL	25	6
BROWN	LINE	15	6

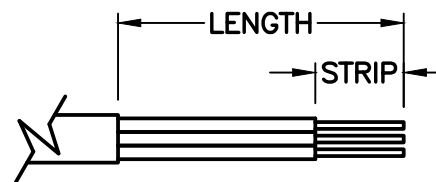

CORDAGE PREPARATION

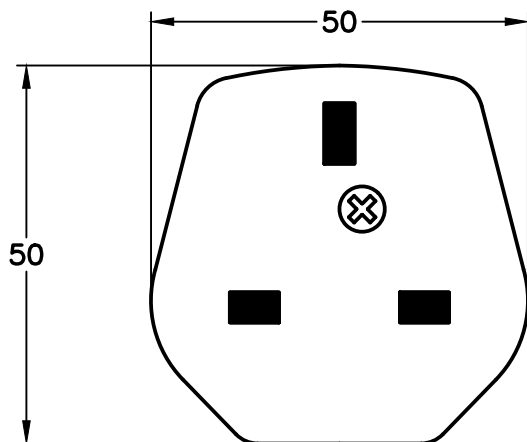

PLUG VIEW

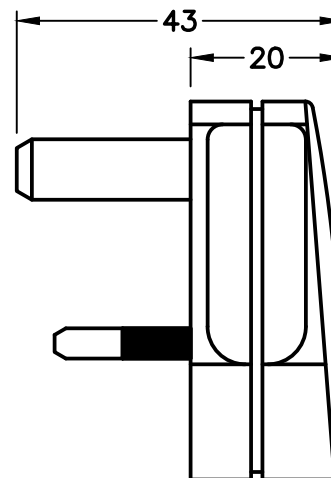

SIDE VIEW