

CAT. No.

76160


SWISS 10 AMPERE 250 VOLT (SW1-10R) SEV 1011 IN-LINE CONNECTOR, 2 POLE-3 WIRE GROUNDING, STRAIGHT CORD GRIP, CORD DIA. = 0.394", THERMOPLASTIC BODY, HIGH IMPACT RESISTANT. BLACK.

APPROVALS	SEV <input checked="" type="checkbox"/>
CERTIFICATIONS	REACH <input checked="" type="checkbox"/> ROHS <input checked="" type="checkbox"/> CE <input checked="" type="checkbox"/>
STANDARDS	SEV 1011 <input checked="" type="checkbox"/>


ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)


<u>CORDAGE PREPARATION</u>			
<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN/YELLOW	GROUND	15	6
BLUE	NEUTRAL	21	6
BROWN	LINE	21	6

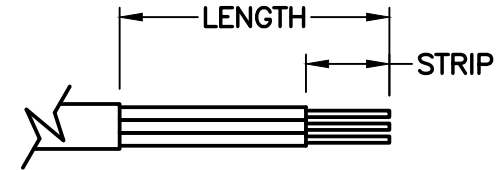


CORDAGE PREPARATION

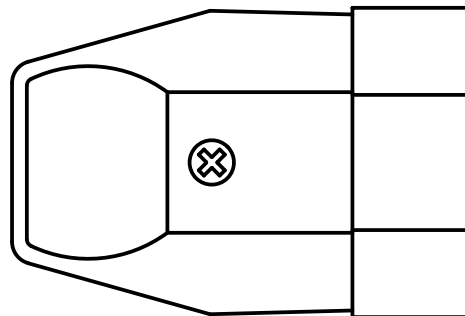

TOP VIEW

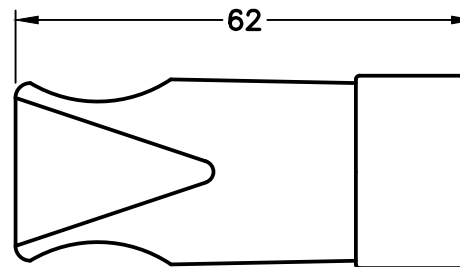

SIDE VIEW

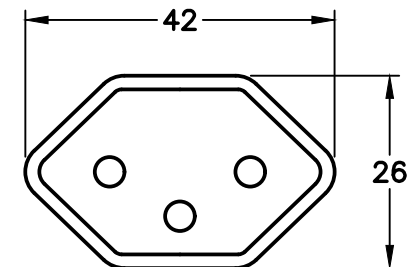

CONNECTOR VIEW