

CAT. No.
888-31001

IEC 309 CEE 17 CONNECTOR WITH CABLE SLEEVE, BLUE, 20 AMPERE 250 VOLT (UL/CSA);
16 AMPERE 220/240 VOLT (EUROPEAN); 50/60 HZ, 2 POLE + EARTH
STANDARDS: IEC 309-1, IEC 304-2, BS 4343, DIN 49462/63, VDE 0623, CEE 17, EN 60309


APPROVALS / CERT'S. CSA DEMKO NEMKO OVE SEMKO UL VDE

ALL DIMENSIONS ARE IN MILLIMETERS



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 16 DIA (0.630")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 16 DIA (0.630")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	30	10
BLUE	NEUTRAL	35	10
BROWN	LINE	35	10

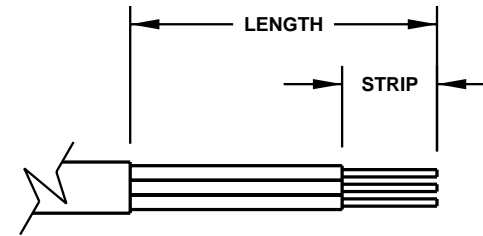

CORDAGE PREPARATION

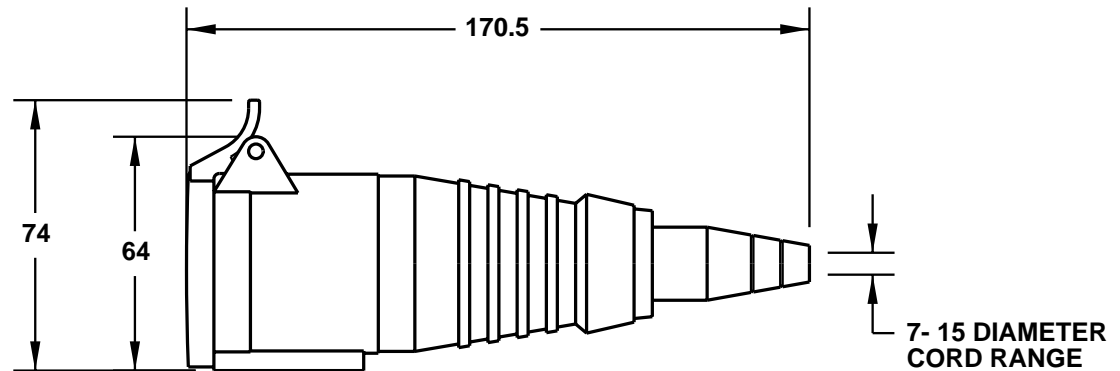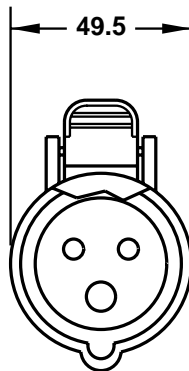

NOTE: FOR CLARITY THIS VIEW IS SHOWN WITH LIFT LID BROKEN