

CAT. No.

57090-M

IEC 60320 C-19 IN-LINE CONNECTOR, 20A-250V / 20A-125V (UL/CSA), IMPACT RESISTANT NYLON BODY, MOISTURE/DUST SHIELD, 2 POLE-3 WIRE GROUNDING (2P+E), CLAMP TYPE SCREW TERMINALS ACCEPT 10/3, 12/3, 14/3, 16/3, 18/3 AWG CONDUCTORS, CORD GRIP RANGE = 0.300-0.655" DIA. CORD, BLACK.

APPROVALS

UL ☒ CSA ☒

CERTIFICATIONS

ROHS ☒

STANDARDS


IEC 60320 C-19 ☒ UL 498 ☒ CSA C22.2 NO.42 ☒ IEC/EN 60320-1 ☒

ALL DIMENSIONS ARE IN MILLIMETERS


MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 16 DIA (0.655")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 16 DIA (0.655")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 mm² (12 AWG)

CORDAGE PREPARATION


<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN/YELLOW	GROUND	32	12
BLUE	NEUTRAL	32	12
BROWN	LINE	32	12

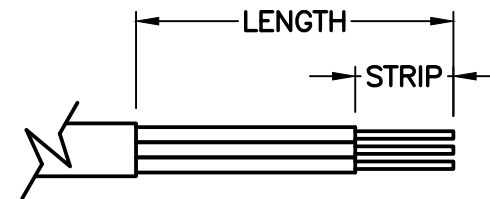

CORDAGE PREPARATION

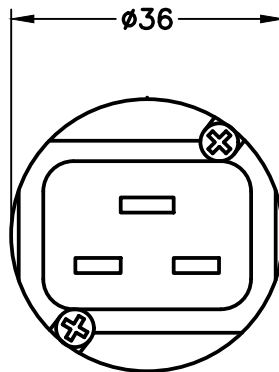

IEC 60320 C-19
FRONT VIEW

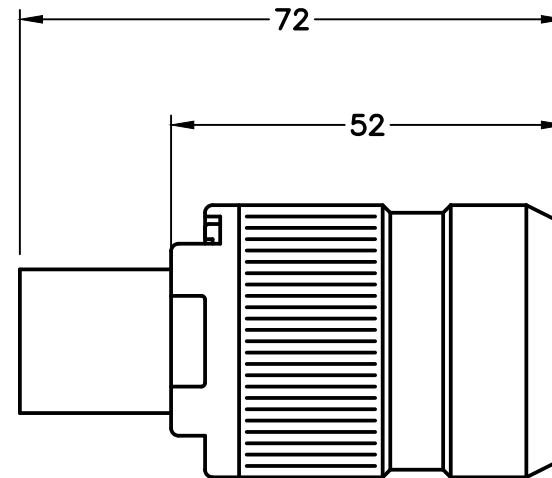SIDE VIEW

International Configurations, Inc. 210 Moody Rd., Enfield, Connecticut 06082 Tel: (860)749-6380 Fax: (860)749-2985

www.InternationalConfig.com sales@internationalconfig.com

Copyright 2021 International Configurations, Inc. All Rights Reserved ©