
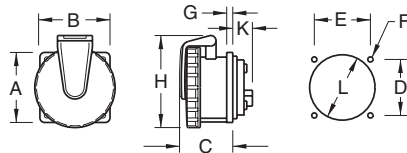


IEC 60309 - CEE 17 IP 67 Watertight Receptacles

Panel Mount, Straight Type


50/60 Hz	IEC 60309 BS 4343 SABS 1239 VDE 0623 DIN 49462/63						DIMENSIONS										
	VOLTAGE	AMPS	POLES				GROUND POSITION	CATALOG NO.	STYLE NUMBER	A	B	C	D	E	F	G	H
100/130 V	16 A	2 P + E	4H	999-1371	1	62	62	60.5	47	47	5.5	4.5	81	16.5	50		
100/130 V	32 A	2 P + E	4H	999-13023	1	75	75	71.5	60	60	5.5	6.5	105	15	70		
100/130 V	63 A	2 P + E	4H	999-1395	2	106	106	84	80	80	7	-	113	54	65		
100/130 V	125 A	2 P + E	4H	999-1400	2	120	120	90	100	100	7	-	126	68	85		
200/250 V	16 A	2 P + E	6H	999-1372	1	62	62	60.5	47	47	5.5	4.5	81	16.5	50		
200/250 V	16 A	3 P + E	9H	999-31429	2	75	75	58	60	60	5.5	-	83	26	45		
120/208-144/250 V	16 A	3 P + N + E	9H	999-1381	1	75	75	62	60	60	5.5	6.5	98	16.5	70		
200/250 V	32 A	2 P + E	6H	999-13024	1	75	75	71.5	60	60	5.5	6.5	105	15	70		
200/250 V	32 A	3 P + E	9H	999-32429	2	75	75	65	60	60	5.5	-	100	36	60		
120/208-144/250 V	32 A	3 P + N + E	9H	999-1369	1	85	75	71.5	60	60	5.5	6.5	113	15	70		
200/250 V	63 A	2 P + E	6H	999-1396	2	106	106	84	80	80	7	-	113	54	65		
200/250 V	63 A	3 P + E	9H	999-1399	2	106	106	84	80	80	7	-	113	54	65		
120/208-144/250 V	63 A	3 P + N + E	9H	999-13103	1	107	107	100.5	85	77	5.5	13.5	116	38	80		
200/250 V	125 A	2 P + E	6H	999-1402	2	120	120	90	100	100	7	-	126	68	85		
200/250 V	125 A	3 P + E	9H	999-1404	2	120	120	90	100	100	7	-	126	68	85		
120/208-144/250 V	125 A	3 P + N + E	9H	999-3459	2	120	120	90	100	100	7	-	126	68	85		
380/415 V	16 A	2 P + E	9H	999-1373	1	62	62	60.5	47	47	5.5	4.5	81	16.5	50		
380/415 V	16 A	3 P + E	6H	999-1376	1	75	75	61.5	60	60	5.5	6.5	89	16.5	56		
200/346-240/415 V	16 A	3 P + N + E	6H	999-1382	1	75	75	62	60	60	5.5	6.5	98	16.5	70		
380/415 V	32 A	2 P + E	9H	999-13025	1	75	75	71.5	60	60	5.5	6.5	105	15	70		
380/415 V	32 A	3 P + E	6H	999-13028	1	75	75	71.5	60	60	5.5	6.5	105	15	70		
200/346-240/415 V	32 A	3 P + N + E	6H	999-1370	1	85	75	71.5	60	60	5.5	6.5	113	15	70		
380/415 V	63 A	2 P + E	9H	999-3339	2	106	106	84	80	80	7	-	113	54	65		
380/415 V	63 A	3 P + E	6H	999-13100	2	106	106	84	80	80	7	-	113	54	65		
200/346-240/415 V	63 A	3 P + N + E	6H	999-13104	1	107	107	100.5	85	77	5.5	13.5	116	38	80		
380/415 V	125 A	2 P + E	9H	999-3439	2	120	120	90	100	100	7	-	126	68	85		
380/415 V	125 A	3 P + E	6H	999-1406	2	120	120	90	100	100	7	-	126	68	85		
200/346-240/415 V	125 A	3 P + N + E	6H	999-1408	2	120	120	90	100	100	7	-	126	68	85		

All dimensions are in millimeters (1 mm = 0.039")



STYLE No. 1

PANEL CUTOUT



STYLE No. 2

PANEL CUTOUT



© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 187